FRONTIER MEDICAL SCREENS UNI-9175 CLASSE 1 1M CERTIFICATE



Early Learning Furniture

01733 511121 sales@earlylearningfurniture.co.uk



LAPI LABORATORIO PREVENZIONE INCENDI s.p.A. I-59100 PRATO - Loc. La Querce - Via della Quercia, 11 Tel. +39 0574 575320 - Fax +39 0574 575323 e.mail: lapi@laboratoriolapi.it web site: www.laboratoriolapi.it




- ORGANISMO NOTIFICATO IN CONFORMITÀ A REGOLAMENTO PRODOTTI DA COSTRUZIONE 305/2011/EU
 ORGANISMO NOTIFICATO IN CONFORMITÀ A DISPOSITIVI DI PROTEZIONE INDIVIDUALE DIR. 89/686/CEE
- ORGANISMO NOTIFICATO DIRETTIVA EQUIPAGGIAMENTI MARITTIMI 2014/90/EU
 MEMBRO EGOLF e UNIFER
- MEMBRO EGOLF e UNIFER
 RICONOSCIUTO USCG ADMINISTRATION
- RICONOSCIUTO CERTIFER
- RICONOSCIUTO ITALCERTIFER
- CERTIFICATO REGISTRO AERONAUTICO ENAC CIT 1013/L
 AUTORIZZAZIONE MINISTERO INTERNO D.M. 26/03/85
- AUTORIZZAZIONE MINISTERO INTERNO D.M
 ACCREDITATO ACCREDIA N.0086 EN 17025
- PROVINCIUTO DIR.2014/90/EU MARINE EQUIPMENT BUREAU VERITAS DNV-GL LLOYD'S REGISTER
 PROVE SU AUTOVEICOLI AI SENSI DELLA DIRETTIVA 95/28 CE E REG. 118
- PROVE SU AUTOVEICOLI AI SENSI DELLA DIRETTIVA 95/28 CE E REG. 118
 AUTORIZZATO BHF CALIFORNIA, CARB CALIFORNIA, CPSC USA
- AUTORIZZATO VKF SVIZZERA E EBA GERMANIA

Spettabile

CAMIRA FABRICS Ltd

Meltham Mills, Meltham, Huddersfield, West Yorkshire, HD9 4AY (United Kingdom)



In riferimento alle Vs. richieste, Vi rimettiamo in allegato ns. Rapporto di Prova in doppia lingua (italiano/inglese), contenente i risultati della prova effettuata su Vs. materiale:

With reference to your order, please find enclosed our Test Report in double language (italian/english), containing the results of the test effected on your material:

Denominazione commerciale	Metodo di prova	Rif. Laboratorio
Trade name	Test method	Laboratory Ref.
VITA (C) Nom. weight of the material: 850 g/m ²	UNI 9175: 2010 Reazione al fuoco mobili imbottiti <i>Reaction to fire of upholstered products</i>	2309/18

Nota: Prova effettuata su ipotesi di mobile imbottito (Tessuto fornito dal Richiedente + Imbottitura fornita dal Laboratorio). **Note:** Test effected on a upholstered piece of furniture hypothesis (Fabric supplied by the Sponsor + Filling supplied by the Laboratory).

Distinti saluti, Best Regards











RAPPORTO DI PROVA NO. 2309.0UN0101/18

Test Report no.

METODO DI PROVA: Test method	UNI 9175: 2010
DENOMINAZIONE DELLA PROVA:	Reazione al fuoco mobili imbottiti
Description of the standard	Reaction to fire of upholstered products
RICHIEDENTE:	CAMIRA FABRICS Ltd
Sponsor	Meltham Mills, Meltham, Huddersfield,
	West Yorkshire, HD9 4AY (United Kingdom)
DENOMINAZIONE DEL MATERIALE: Denomination of the material	VITA (C)
PESO NOM. E COLORE DEL MATERIALE: Nom. weight and colour of the material	850 g/m ² - Americano
DATA RICEVIMENTO CAMPIONI: Date of the samples receipt	09/10/2018

Nota: Prova effettuata su ipotesi di mobile imbottito (Tessuto fornito dal Richiedente + Imbottitura fornita dal Laboratorio). *Note:* Test effected on a upholstered piece of furniture hypothesis (Fabric supplied by the Sponsor + Filling supplied by the Laboratory).

- Questo Rapporto di Prova è costituito da / This Test Report consists of:
- no. 5 pagine (compresa la presente) / no. 5 pages (including this one).
- no. 2 allegati / no. 2 annexes.

I risultati riportati in questo Rapporto di Prova si riferiscono esclusivamente al materiale sottoposto a prova fornito dal Richiedente (Rif. codice Laboratorio no. 2309/18). Un campione del materiale è stato conservato dal Laboratorio. *The results reported in this Test Report refer exclusively to the material submitted to test and supplied by the*

Sponsor (Ref. Laboratory code no. 2309/18). A sample of the material has been retained by the Laboratory.

Questo Rapporto di Prova, valido esclusivamente per il materiale provato, rispetta metodi e procedure previsti all'art. 3 del D.M. 26.06.84 come modificato dal D.M. 03.09.01.

This Test Report is valid solely for the material tested and is in compliance with methods and procedures prescribed by art. 3 of D.M. 26.06.84 as modified by D.M. 03.09.01.

Non è rilasciato ai sensi degli art. 8 e 10 del D.M. 26.06.84 e D.M. 03.09.01

It is not issued according to art. 8 and 10 of D.M. 26.06.84 and D.M. 03.09.01

II D.M. 03.09.2001 pubblicato nella G.U.R.I. serie generale n.242 del 17 Ottobre 2001 modifica ed integra il precedente D.M. 26.06.84. The D.M. 03.09.2001 published in G.U.R.I. serie generale n.242 of 17 October 2001 amends the preceding D.M. 26.06.84.

Prato, 23/10/2018

Il Direttore del Langratorio
The Director of the Laboratory
PRO PREVEN

1/5

Rapporto di Prova no. **2309.0UN0101/18** *Test Report no.*


METODO DI PROVA / TEST METHOD UNI 9175

Materiale / Material: -----

COMPONENTE COMPONENT	N. SERIE PROVETTE SPECIMENS SERIES N.	ESITO PROVE PER I VARI TEMPI DI INNESCO (IN SECONDI) TEST RESULT FOR THE APPLIED IGNITION TIMES (SECONDS)		
		20	80	140
materiale imbottito	1°	POSITIVO / POSITIVE (0 s postcomb. / afterflame time)		
filling	2°	POSITIVO / POSITIVE (0 s postcomb. / afterflame time)		
manufatto completo	1°	POSITIVO / POSITIVE (0 s postcomb. / afterflame time)	Constanting of	
	2°	POSITIVO / POSITIVE (0 s postcomb. / afterflame time)		
	1°		POSITIVO / POSITIVE (0 s postcomb. / afterflame time)	
	2°		POSITIVO / POSITIVE (0 s postcomb. / afterflame time)	
complete item	3°			
1° 2° 3°	1°			POSITIVO / POSITIVE (0 s postcomb. / afterflame time)
			POSITIVO / POSITIVE (0 s postcomb. / afterflame time)	
	3°			
•	reparazione UNI reparation UNI 9:			CLASSE / <i>CLASS</i> 1 IM
Note / Notes:				
•	: indicato dal Richi I : indicated by Spo			
L'IMBOTTITU DENSITÀ 35 k	RA IMPIEGATA DAL L g/m³, DI CLASSE 1IM	ABORATORIO, E' COSTITUITA [DA UNA SCHIUMA POLIURETAN	ICA ESPANSA FR, CON
THE FILLING	USED HAS BEEN SUP		T IS MADE OF AN EXPANDED P GING TO CLASS 1IM.	OLYURETHANE FLAME
			PREVISTI ALL'ART. 3 DEL D.M.	26.06.1984 COME

MODIFICATO DAL D.M. 03.09.2001.

THIS TEST REPORT IS IN COMPLIANCE WITH METHODS AND PROCEDURES PRESCRIBED BY ART. 3 OF D.M. 26.06.1984 AS MODIFIED BY D.M. 03.09.2001.





Rapporto di Prova / Test Report no. 2309.0UN0101/18 del / of 23/10/2018





DESCRIZIONE DEL MATERIALE

Description of the material Aspetto: tessuto spalmato di colore marrone. Appearance: coated fabric of brown colour. Composizione (*): Superficie : 98.5% Base PVC - 1.5% Spalmatura PU. Substrato: 50% Poliestere lavorato a maglia - 50% Supporto in cotone. Composition (*): Surface: 98.5% PVC base - 1.5% PU Coating. Substrate: 50% Knitted poly - 50% Cotton backing. Campione anisotropo / Anisotropic specimen (*) - Colore / Colour (*): Americano Spessore nominale / Nom. thickness (*): 1.2 mm. - Peso nominale / Nominal weight (*): 850 g/m². Lato esposto (*): indicated dal Richiedente (faccia con etichetta). Side exposed (*): Indicated by the Sponsor (face labelled). Impiego / End use (*): sedute / seating.

(*) - Informazioni fornite dal Richiedente / Information supplied by the Sponsor.

DESCRIZIONE DELLA PROCEDURA DI CAMPIONAMENTO

Description of the sampling procedure

Il campionamento del prodotto è stato effettuato a cura del Richiedente dal lotto di produzione n° D9079 c/o lo stabilimento di CAMIRA FABRICS Ltd sito in Meltham Mills, Meltham, Huddersfield, West Yorkshire, HD9 4AY (United Kingdom), in data 03 Ottobre 2018 (Vedi dichiarazione allegata).

Il Laboratorio non è stato coinvolto in alcuna operazione di campionamento della produzione.

The sampling of the product has been effected by the Sponsor from the production batch n° D9079 c/o the factory of CAMIRA FABRICS Ltd sited in Meltham Mills, Meltham, Huddersfield, West Yorkshire, HD9 4AY (United Kingdom), on 03rd October 2018 (See declaration annexed).

The Laboratory has not been involved in any sampling procedure of the material from the production.

PREPARAZIONE E CONDIZIONAMENTO

Preparation and Conditioning

Il materiale è stato sottoposto al metodo di preparazione UNI 9176: D Il materiale è stato condizionato come prescritto dal metodo applicato.

The material has been submitted to the preparation method UNI 9176: D The material has been conditioned before testing as prescribed by the method in object.





Rapporto di Prova / *Test Report* no. 2309.0UN0101/18 del / of 23/10/2018





PROCEDIMENTO DI PROVA

Test Procedure

La prova è stata eseguita secondo il metodo UNI 9175.

L'imbottitura impiegata, fornita dal Laboratorio è costituita da una schiuma poliuretanica espansa FR, con densità 30 kg/m³ (Elast 30 della ditta Olmo S.p.A.), di CLASSE 1 IM.

L'imbottitura è stata sottoposta a (80±5)°C e (80±5)% U.R. per 72 ore, dopo le quali è stata condizionata in atmosfera standard a (23±2)°C e (50±5)% U.R. per più di 48 ore prima della prova.

The test has been carried out according to the method UNI 9175.

The filling used has been supplied by the Laboratory and consists of an expanded polyurethane flame retardant flexible foam, with density 30 kg/m³ (Elast 30 by Olmo S.p.A.), belonging to CLASS 1 IM. The filling has been stored for 72 hours at (80 ± 5)°C and (80 ± 5)°C R H after which period it has been condition

The filling has been stored for 72 hours at $(80\pm5)^{\circ}$ C and $(80\pm5)^{\circ}$ R.H., after which period it has been conditioned in standard atmosphere at $(23\pm2)^{\circ}$ C and $(50\pm5)^{\circ}$ R.H. for more than 48 hours.

LUOGO E DATA DI SVOLGIMENTO DELL'ATTIVITÀ DI PROVA

Place and test date

L'attività di prova è stata effettuata in data 22/10/2018 presso la sede principale del Laboratorio (Via della Quercia, 11 - Prato).

The test has been effected on date 22/10/2018 c/o the principal place of the Laboratory (Via della Quercia, 11 - Prato).

VALUTAZIONE / JUDGEMENT

Sulla base dei risultati ottenuti e relativamente ai campioni forniti dal Richiedente, al materiale in esame è attribuibile la

On the basis of the obtained results and referring to the samples supplied by the Sponsor, the material is assigned to

CLASSE / CLASS - 1 IM -

di reazione al fuoco / of reaction to fire.

INCERTEZZA DI MISURA Uncertainty of measurement Non applicabile / Not applicable.





Rapporto di Prova / *Test Report* no. 2309.0UN0101/18 del / of 23/10/2018





5/5

Foto / Photos

Campione / Specimen 1

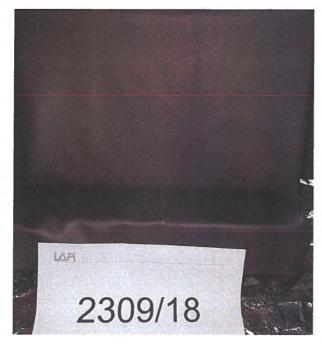


Foto 1: prima della prova / Picture 1: before testing


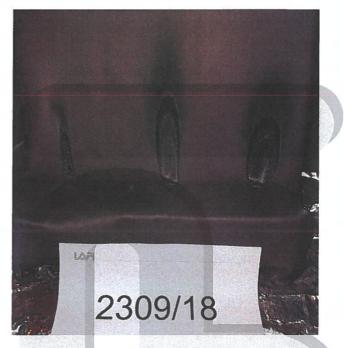


Foto 2: dopo la prova / Picture 2: after testing

Campione / Specimen 2

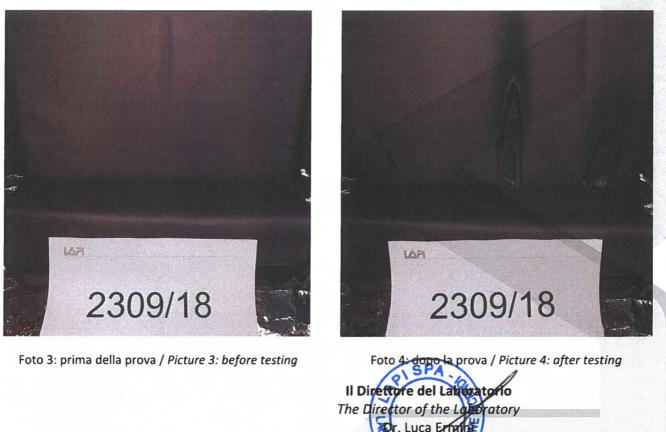

Responsible Person to contact :	
TEST REQUEST HEADING (full address): CA MCHNAM MINS / HDA 4AX	MIRA FABRICS DINVOICE HEADING (full address): CAMIRA FABRICS DD S HOPTON MILLS, MIRFIELD, WELLS
	lita(c)
Technical data of the specimen ²	²⁾ : (see annexed sheet for stratified and composite materials)
Composition (%): 98.5% PUC	(surface) 1.5% Ru Backing (Base) Kritted poly corton
Appearance:	Colour: AMERICANO
Thickness (mm): 1.2 MM	Neight (g/m ²): 350 g.l.m ² Density (kg/m ³):
Possible fire retardant treatment:	-
The specimen is Isotropi	ic Anisotropic
The specimen usually composes a side in	n view (Yes/No): NO
The two sides are identical (Yes/No): .	<i>©</i>
If the two sides are not identical, identify	/ which of the two must be tested:
End use of the article: (CURTAIN, WALL, F	FLOOR, CEILINGS, etc) Seating
	type of glue g/m ²): N/K.
REQUESTED TESTS ON THE SPECIMEN :3) 5)	IN ACCORDANCE TO SPEC. N.3) UNI 9175.
ON1 9175	REQUEST FOR MEASUREMENT UNCERTAINTY (ANNEXED TO THE TEST REPORT ⁶): YES NO
NOTES ON THE SPECIMEN (POSSIBLE DEROGATION	
TO BE FILLED ONLY IN CASE OF TRANSPOR	TATION FIELD TESTS :
SAFETY DATA SHEET	N°
TECHNICAL DATA SHEET	N°
ВАТСН	N* Date
, Date	Stamp and signature of Responsible
26/10/18	h
Notes (to be read to fill this form):	
written on the specimen. LA.P.I reserves itself th	s the exact name that will be written on the Test Report . It has to be univocal and match exactly to possible names he right to not accept specimen whose identification is unclear or ambiguous.
 Technical data reported below will be written o it in a suitable way if possible. 	on the Test Report as indicated by the reference specification. The side to be tested has to be clearly identified, marking
 List the tests to perform and their reference me this field and to enclose a copy of the specifica possible derogations to the method or supplen described on the Test Report. In methods expect sample. 	ethods. If the tests have the purpose to verify the matching of a specimen to a specification, it is useful to mention it in ation. If not specified, we assume the request refers to the latest valid edition of the specification. Indicate in this field mentary procedures to apply during the test. Every derogation and/or supplementary procedure will be referred and cting a preliminary treatment of the specimen, indicate only if you don't want those treatments to be performed on the
from its production.	ession of low density materials" has to be effected, the material has to be sent to the Laboratory not before 72 hours
reported in the product documentation on the p	loes not involve the approval of the product neither by the Laboratory nor by the Accreditation Body. Moreover, the ce to the accreditation of the Laboratory shall not be used by the Customer In any way, and in particular shall not be product itself. A copy of the Test Report can be attached.
 6) The Responsibility of LAPI SpA is limited to the va 7) In case LAPI can not finish the tests for technical respect of LAPI SpA 	alue of the activities regarding tests requested al reasons attributable to LAPI SpA , tests will not be charged and no recourse in terms of additional costs will be due in
5) The customer / Producer, (who presents and sig risks arising from simple handling ,conditioning a people, equipment and property.	is not responsible, in the event of a negative result of the test, of the previous marketing in case of not-compliance. gns the request to perform the laboratory tests) if does not properly and clearly explicit in the data sheets any safety as a result of thermal cycling or destructive tests laboratory on of their own material, is responsible for any damage to exempted from any responsibility for accidents and damages to people and things could happen during testing due to
the material under testing.	energiese from any responsionity for accuerts and damages to people and things could happen during testing due to

11) The "Declaration of Measure uncertainty" will be annexed to the Test Report if the test method is under ACCREDIA accreditation and includes a Declaration of conformity.

12) Following the acceptance of costs proposed, cancellation of the order involves the payment of 30% of the cost of the test for practice management cost coverage.
 13) In case of difference of trade names reported in the Tests Request and Sampling modules, the name reported in the Test Request will be considered predominant.



TECHNICAL SHEET (fac simile)

A) MANUFACTURER: CAMIRA FABRICS LTD.

- B) COMMERCIAL NAME: VITA (C)
- C) C) DESCRIPTION OF THA MATERIAL:

surface - 98.5% PVC Base, 1.5% PU cotting. substrate - Knitted poly Icotton Backing 50/50%.

1) nature of components:%......

warp% N° THREADS/ cm weft% N° THREADS/ cm

the material is (isotropic/anisotropic with two sides equal/different) processing:

- 3) weight: g/mq
- D) COMPLEX OF DIFFERENT COMPONENT:
- E) LAYING: HUNG, SUSCEPTIBLE TO CATCHING FIRE ON SIDE ONLY.
- F) APPLICATION: CURTAINS, DROP CURTAINS, DRAPES

G) MAINTENANCE: metod A UNI 9176/98

Date, B 26 10 18

2

Firm (Legal Representative)



FAC-SIMIL MODEL

TO BE COMPILED ON COMPANY'S HEADED PAPER

The undersigned
Katy longstaff
in bis/her capacity of legal representative of the Company. Caniva Fabrics LTD
declares that the sampling named $Vita(c)$
and sent to be tested
was taken from the production batch n° D9079
c/o the factory CAMIRA FABRICS /MEITHAM MILLS (indicate the address)
on (day:)
safety sheet n° (to be annexed with stamping)

technical data sheet n° (to be annexed with stamping)...-

Date, 26/10/18

Signature

m

NOTE: IF THE REQUIRED DATA WERE NOT AVAILABLE, SUPPLY AS MANY DETAILS AS POSSIBLE IN ORDER TO IDENTIFY THE MATERIAL THE SAMPLING WAS TAKEN FROM

file: preleng.doc