



Rectangular Mobile Folding Bench



Features:

• **Choice of Two Heights.**

Primary and Secondary seat and table heights that conform to BS EN 1729.

• **Transport Locking Positions.**

This tables footprint takes up 26% less floor area than our previous model. More tables, less space.

• **Transport & Storage Table Heights.**

Can fit through a standard height doorway (1980mm), no need to tilt tables to move between storage and dining areas.

• **Open Position Safety Lock.**

Ensures that the table will not automatically revert to the folding position.

• **Easy-clean Intermediate Lock.**

Helps to access the cleaning of the table tops and floor area beneath for improved hygiene.

• **Double Sided Laminated MDF Tops.**

Water resistant, easy-clean for improved hygiene. Can be replaced on site.

• **Ultra Tuff Rubber Edged.**

Water resistant, easy-clean for improved hygiene.

Table Material/Frame Information:

Gauge of Frame: 2mm. Diameter of Steel: 32mm. Paint: Powder Coated Scratch Resistant Grey.

Material: Mild Steel (Density: 7850kg/m³, Young's Modulus: 210000MPa)

Torsion:

Folding Mechanism: Pivot Points and Cups controlled by Torsion Bar. Average Torsion: 75Nm

Seating Capacity:

Maximum Load: 450kg per seat evenly spread, DO NOT POINT LOAD. Number of Seating Positions: 12-16 Dependant on age.

Castor Information:


Castor Frame Work: Mild Steel (Density: 7850kg/m³, Young's Modulus: 210000MPa). Locking: Yes, Directional and Rotational Lock. Steel Foot Locking Pedal. Rotating: Yes, 5mm ball bearing device. Castor Bolt: M10. Wheel Type: 5mm Ball Bearing Low Friction Castor. Wheel Diameter: 100mm. Tread: Grey Rubber. Tread Depth: 30mm. Total Height: 150mm

Colour Options:

Table and Seat Tops: Grey, Blue, Maple. Frame: Grey



Rectangular Mobile Folding Bench

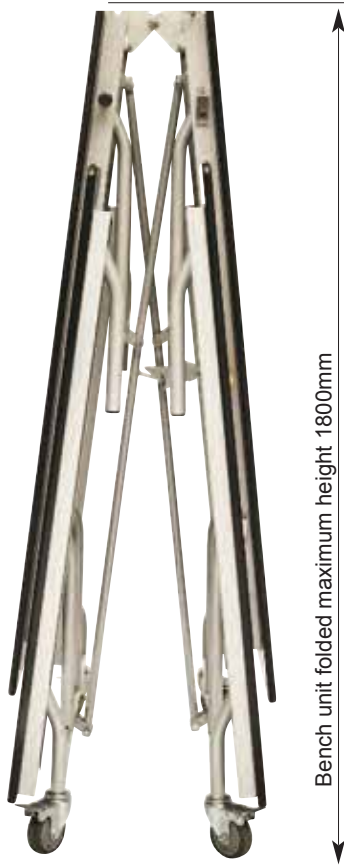

Bench unit folded maximum height 1800mm



Warranty:

The tables carry an extended 16 year warranty and must be maintained as below. You must have a yearly maintenance visit by the manufacturer to qualify for this extended warranty.

Maintenance:

Regularly inspect tables for correct operation, smooth folding and general stability. Clean table tops according to current food service hygiene practices after each use, exterior components of tables should be inspected for food deposits and cleaned as required. The underside of the tables should be inspected for chewing gum and other food deposits. CAUTION:- Excessive use of water during cleaning may cause corrosion. Periodic lubrication (with a food grade silicon spray) is required to be applied to pivot joints, we recommend lubrication every six months or more frequently if indicated by stiff operation or noise.

Safety:


All products are manufactured in an ISO 9001 Quality Assured environment. Conform to BS EN 1729-2:2006, BS EN 1022:2005 and BS EN 15373:2007 (suitable for severe contract and educational use)

Recommended Uses:

Schools, Colleges, Council Catering, Canteens and Cafeterias.

Sizes:

Table Deployed: 3080x1400mm. Table Storage: 645x1400x1800 or 1850mm
Seat Depth: 230mm. Seat Length: 1305mm. Seat Height: 375 or 425mm
Surface Area: 3080x760mm. Table Top Height: 685 or 735mm

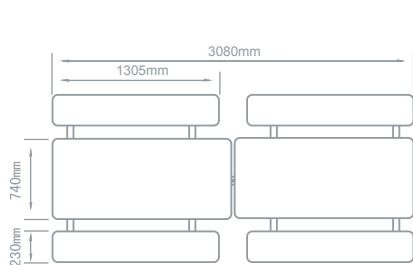

	27	29
A	685mm	735mm
B	375mm	425mm
C	1800mm	1850mm

